



ARBEITSSCHEINWERFER RÜCKFAHRLEUCHE WORKING LAMPS REVERSE LAMPS






ARBEITSSCHEINWERFER RÜCKFAHRLEUCHT

Die Arbeits- und Rückscheinwerfer von Aspöck werden für maximale Beständigkeit unter extremen Bedingungen entwickelt. Langlebigkeit, hohe Lichtleistung und geringe Stromaufnahme sorgen dafür, dass der Arbeitsplatz auch bei schlechten Lichtverhältnissen und jedem Wetter optimal ausgeleuchtet ist.

WORKING LAMP REVERSE LAMP

The reverse lights and working lights by Aspöck have been developed for maximum resistance under extreme conditions. Longevity, high light output and low power consumption ensure that the workplace can be optimally illuminated even in poor light conditions and in any weather.

QUALITÄTSLEVEL QUALITY LEVEL

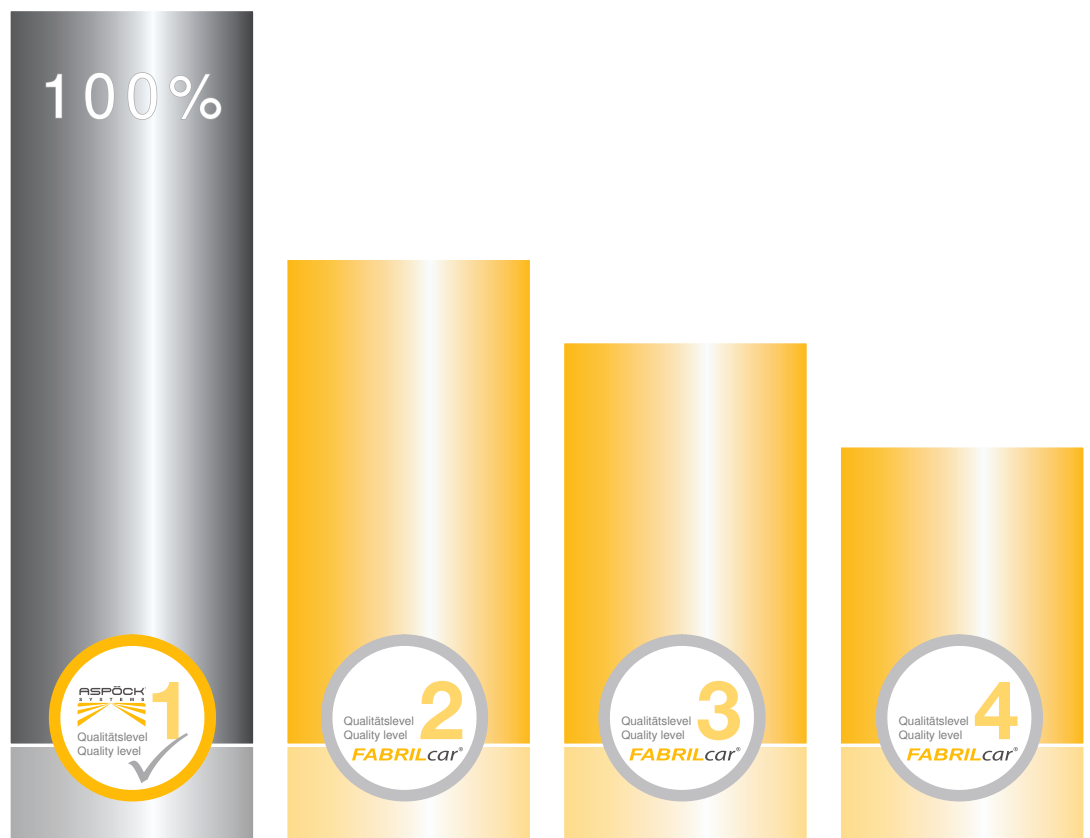



ASPÖCK
SYSTEMS

ASPÖCK
SYSTEMS



Reverse Lamp LED

ADR Zone 2 (E) E R23 E R10 LED IP56K EMC

38-8200-001



LUMEN 200	↔ 2,50 m
°C -40 ~ +80	⚡ 12 V / 24 V
↑ 160 x 100 x 62 mm	

Workpoint LED 1500

ADR Zone 2 (E) E R23 E R10 LED IP6K9K EMC

38-8220-001



WATT 25	LUMEN 1500
↔ 1,50 m	FLOOD
⚡ 12 V / 24 V	°C -40 ~ +80
↑ 112 x 153 x 48 mm	

Workpoint LED 3000

ADR Zone 2 (E) E R10 LED IP6K9K EMC

38-8221-001



WATT 50	LUMEN 3000
↔ 1,50 m	SPOT
⚡ 12 V / 24 V	°C -40 ~ +80
↑ 112 x 95 x 76 mm	

Workpoint LED 3000

ADR Zone 2 (E) E R10 LED IP6K9K EMC

38-8221-101



WATT 50	LUMEN 3000
↔ 1,50 m	FLOOD
⚡ 12 V / 24 V	°C -40 ~ +80
↑ 112 x 95 x 76 mm	

Workpoint LED 650

ADR Zone 2 (E) E R10 LED IP56K EMC

39-6400-011



LUMEN 650	↔ 2,50 m
FLOOD	⚡ 12 V / 24 V
↑ 83 x 83 x 68 mm	

Working / Reverse Lamp

ADR Zone 2 (E) E R23 E R10 IP5K4K EMC

38-9000-001



WATT 21	↔ 2,50 m
⚡ 24 V	
↑ 112 x 101 x 101 mm	

Working / Reverse Lamp

ADR Zone 2 (E) E R23 E R10 IP5K4K EMC

38-9100-001



WATT 70	↔ 2,50 m
⚡ 24 V	
↑ 112 x 101 x 97 mm	



Working / Reverse Lamp LED 1200 F

CE LED IP 67 EMC

42-1000-001*

WATT 15 LUMEN 1200
1,50 m FLOOD
10 - 30 V C° -40 ~ +50
110 x 110 x 37 mm

reverse light

2

Working Lamp LED 1200 F

LED IP 67 EMC

42-1000-101*

WATT 15 LUMEN 1200
1,50 m FLOOD
10 - 30 V C° -40 ~ +50
85 x 85 x 38 mm

2

Battery Working Lamp LED 1000F

CE LED

42-1000-211

WATT 15 LUMEN 1000
FLOOD BASE
2 HOURS 5 HOURS
10 - 24 V PLASTIC HOUSING
103 x 122 x 97 mm

plastic housing

3 Stufen: Hoch / Energiesparmodus / SOS Licht
3 modes: High Power / ECO / SOS Flash

2

Working / Reverse Lamp LED 2000 F

CE LED IP 67 EMC

42-1001-001*

WATT 27 LUMEN 2000
1,50 m FLOOD
10 - 30 V C° -40 ~ +50
109 x 109 x 56 mm

reverse light

2

Mini Working Lamp LED 2000 F

LED IP 67 EMC

42-1001-301*

WATT 10 LUMEN 2000
1,50 m FLOOD
10 - 30 V PLASTIC HOUSING
110 x 94 x 68 mm

plastic housing

4

Working Lamp LED 2000 S

LED IP 67 EMC

42-1002-001*

WATT 22 LUMEN 2000
1,50 m SPOT
10 - 30 V C° -40 ~ +50
115 x 115 x 62 mm

3

Working Lamp LED 3500 F

LED IP 67 EMC

42-1003-001*

WATT 36 LUMEN 3500
1,50 m FLOOD
10 - 30 V C° -40 ~ +50
110 x 110 x 69 mm

3

Working Lamp LED 3600 F

LED IP 67 EMC

42-1003-301*

WATT 40 LUMEN 3600
1,50 m FLOOD
10 - 30 V C° -40 ~ +50
125 x 115 x 90 mm

3

Working Lamp LED 800 F

LED IP 67 EMC

42-1004-001*

WATT 10 LUMEN 800
1,50 m FLOOD
10 - 30 V C° -40 ~ +50
55 x 55 x 65 mm

3

Working Lamp LED 800 S

LED IP 67 EMC

42-1004-101*

WATT 10 LUMEN 800
1,50 m SPOT
10 - 30 V C° -40 ~ +50
55 x 55 x 65 mm

3

Working Lamp LED 1800 F

CE LED IP 67 EMC

42-1006-001*

WATT 12 LUMEN 1800
1,50 m FLOOD
10 - 30 V PLASTIC HOUSING
105 x 105 x 27 mm

plastic housing

2

Working Lamp LED 1800 F

LED IP 67 EMC

42-1007-001*

WATT 16 LUMEN 1800
1,50 m FLOOD
10 - 30 V C° -40 ~ +80
140 x 90 x 60 mm

2

Working Lamp LED 1800 S

LED IP 67 EMC

42-1007-011*

WATT 16 LUMEN 1800
1,50 m SPOT
10 - 30 V C° -40 ~ +80
140 x 90 x 60 mm

2

Working / Reverse Lamp LED 900 F

CE LED IP 67 EMC

42-1008-001*

WATT 10 LUMEN 900
1,50 m FLOOD
10 - 30 V C° -40 ~ +50
83 x 83 x 76 mm

reverse light

2



Working Lamp LED 2000 F

42-1008-301*

WATT 18	LUMEN 2000
1,50 m	FLOOD
10 - 30 V	C° -40 ~ +50
↑ 113 x 63 x 53 mm	


Working Lamp LED 1300 F

42-1008-401*

WATT 13	LUMEN 1300
1,50 m	FLOOD
10 - 30 V	C° -40 ~ +50
↑ 160 x 48 x 63 mm	

*** ACCESSORIES**

Magnet Base 42-1007-101*

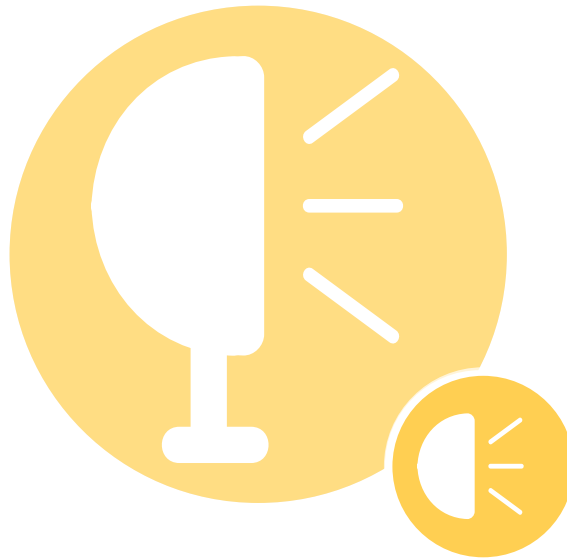

	ARBEITSSCHEINWERFER WORKING LAMP		VOLT		PUNKTAUSLEUCHTUNG SPOT LIGHT
	RÜCKFAHRLEUCHE REVERSE LAMP		WATT		AKKULADEZEIT IN STUNDEN BATTERY CHARGING TIME IN HOURS
	ADR ZONE 2		LUMEN		MAGNETHALTERUNG MAGNETIC BASE
	VOLL LED FULL LED		TEMPERATURBEREICH TEMPERATURE RANGE		AKKUBETRIEBSZEIT IN STUNDEN BATTERY WORKING TIME IN HOURS
	E- ZULASSUNG E-APPROVAL		CE		ELEKTROMAGNETISCHE VERTRÄGLICHKEIT ELECTROMAGNETIC COMPATIBILITY
	ABMESSUNG DIMENSION		IP SCHUTZKLASSE IP RATING		
	OFFENES ENDE, KABELLÄNGE OPEN END, LENGTH OF CABLE		FLUTAUSLEUCHTUNG FLOOD LIGHT		

THE ART OF LIGHTS

ASPÖCK Systems GmbH

Enzing 4, 4722 Peuerbach, AUSTRIA

Office: +43 7276 2670-0 | Fax: +43 7276 2670-1199

E-Mail: office@aspoeck.com | www.aspoeck.com

10-0340-207
ASP_FAB_SPARE_LE_WORKREVE_04_DE/E_022019
Printing errors, technical changes
as well as picture changes reserved.
© Aspöck Systems GmbH

FABRILcar[®]
powered by ASPÖCK[®]

Ihr Partner für alternative Komponenten

FABRILcar[®] deckt eine Vielfalt an Produkten ab, die das **ASPÖCK**[®] Premiumsortiment erweitern und dadurch zusätzliche Lösungen ermöglichen. Mit diesem Komplettangebot aus beiden Marken profitieren Sie doppelt.

FABRILcar[®] bietet des weiteren günstige Alternativen für die wirtschaftliche Instandhaltung und Reparatur eines in die Jahre gekommenen Fuhrparks.

Your partner for alternative components

FABRILcar[®] covers a variety of products, which extends the **ASPÖCK**[®] premium range and offers additional solutions for your fleet. You will benefit from a range of products available from both brands.

In addition **FABRILcar**[®] offers cost-saving alternatives for an economically maintenance and repair of older vehicles.

